

AQUA COOLER®



B SERIES

Caprice

BOTTLE WATER COOLERS

MODELS

B30-11 "CAPRICE" HOT & COLD
STAINLESS STEEL & SPIKE TOP

B30-12 "CAPRICE" HOT & COLD
STAINLESS STEEL & PROBE TOP

B40-11 "CAPRICE" COOK & COLD
STAINLESS STEEL & SPIKE TOP

B40-12 "CAPRICE" COOK & COLD
STAINLESS STEEL & PROBE TOP

FEATURES

Beautiful slimline styling.

Reflective stainless steel panels to blend into the surrounding environment.

Easy to clean surfaces.

Complimentary black ABS front panel to enhance aesthetics.

AQUA COOLER PTY LIMITED

14-16 MARJORIE STREET
SEFTON NSW 2162
AUSTRALIA

TELEPHONE (612) 9743 9233

FACSIMILE (612) 9743 9244

EMAIL sales@aquacooler.com.au
coolers@aquacooler.com.au

INTERNET aquacooler.com.au

Caprice

AQUA COOLER®

WATER RESERVOIR

Cold Water 1.8 litre Stainless Steel tank which delivers 5 litres of chilled water per hour, at approximately 8-10°C.

Hot Water 2.1 litre Stainless Steel tank which delivers 4.5 Litres of hot water per hour at approximately 90°C at the tap.

REFRIGERATION

All products use 40gms of R134a Refrigerant, which is environmentally friendly.

TEMPERATURE CONTROL

Cold Water Factory pre-set thermostat.

Hot Water 2 Factory pre-set thermostats including a safety cut off.

COMPRESSORS

1/8 hp capacity, 100 watts. The compressor is hermetically sealed for silent running.

CONDENSER

The static condenser is all steel tube and wire construction.

ELECTRICAL

240 volts, 50Hz. A 2 metre house cable is included.

PERFORMANCE TO ARI 1010-94 STANDARD

Inlet water – 26.7°C
 Outlet water – 10°C
 Ambient air – 32.2°C.

WEIGHT - PACKED


20kg

DIMENSIONS - PACKED

Width – 36 cm	Container Capacity
Depth – 39 cm	20ft – 192 units
Cubic – 102 cm	40ft – 396 units

WARRANTY

Twelve months comprehensive.

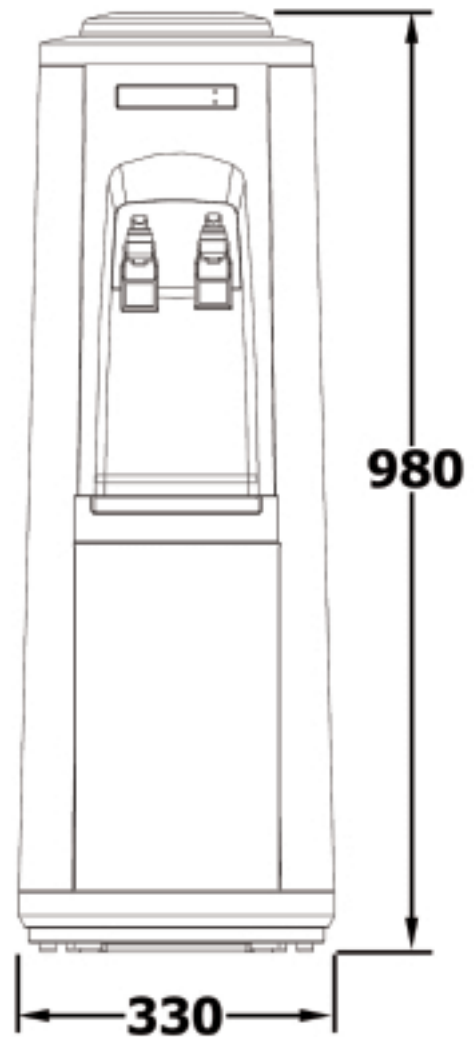

DISTRIBUTED BY

OTHER FEATURES

- Professionally supported by Aqua Cooler.
- Dishwasher safe drip tray and grid.
- Function display lights.
- Isolation switches for both Hot and Cold reservoirs.